




**(10) International Publication Number**  
**WO 02/092956 A1**

## PCT

- [Continued on next page]*

1  
 2  
 3  
 4  
 5  
 6  
 7  
 8  
 9  
 10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525

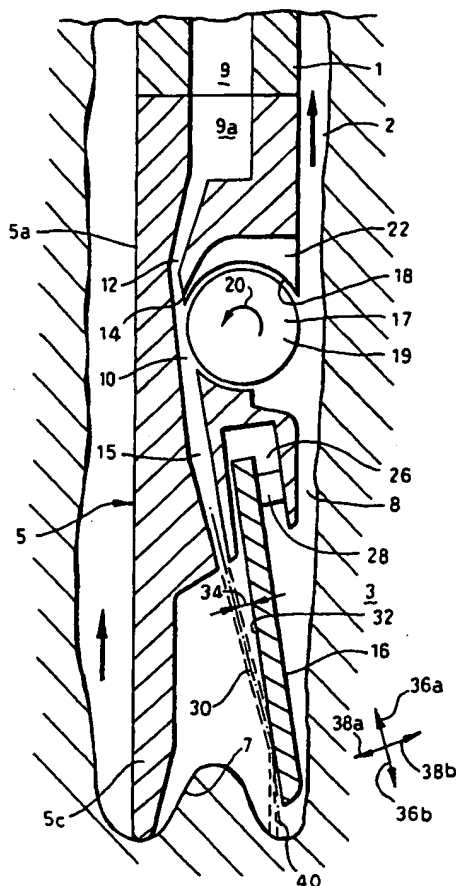

**(57) Abstract:** A jet cutting device comprising a cutter head provided with at least one nozzle for ejecting a stream of fluid against a body so as to create a selected cut in said body, is disclosed. For each nozzle, the cutter head is provided with a deflector having a deflection surface arranged to deflect the stream of fluid ejected by the nozzle into a selected direction in accordance with the position of said cut to be created.

**WO 02/092956 A1**



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report

## JET CUTTING DEVICE WITH DEFLECTOR

The invention relates to a jet cutting device comprising a cutter head provided with one or more nozzles for ejecting a stream of fluid against a body so as to create a cut in the body. The jet cutting device  
5 can be applied, for example, in the industry of machining work pieces or in the industry of rock cutting during drilling of boreholes into the earth formations.

WO 00/66872 discloses a rock cutting device whereby a stream of drilling fluid containing abrasive particles is  
10 ejected against the borehole bottom or borehole wall by a nozzle provided at a cutter head of the device.

A problem of the known device is that the direction of the ejected stream cannot be as optimal as desired in view of limitations regarding the position of the nozzle  
15 at the cutter head. For example in certain applications it is desirable that the ejected stream passes close to, and substantially parallel to, the borehole wall in order to accurately cut the borehole circumference. However, the position of the nozzle inwardly from the outer radius  
20 of the cutter head prevents such stream direction.

It is therefore an object of the invention to provide an improved jet cutting device which overcomes the  
aforementioned problem.

In accordance with the invention there is provided a  
25 jet cutting device, comprising a cutter head provided with at least one nozzle for ejecting a stream of fluid against a body so as to create a selected cut in said body, wherein, for each nozzle, the cutter head is provided with a deflector having a deflection surface  
30 arranged to deflect the stream of fluid ejected by the

nozzle into a selected direction in accordance with the position of said cut to be created.

It is thereby achieved that the ejected stream can be deflected in directions other than the direction of ejection of the stream from the nozzle.

The jet cutting device is attractive for wellbore drilling, as it allows to drill a central part of the borehole by a portion of the stream not deflected by the deflector, and to drill a radial outer part of the borehole by a portion of the stream deflected by the deflector positioned close to the borehole wall thus allowing the outer circumference of the borehole to be accurately cut.

To focus the stream and to increase the cutting efficiency, the deflector suitably has a concave deflection surface onto which the stream impacts. Alternatively, when it is desired to diverge the stream, the nozzle can be arranged to eject the stream against a convex deflection surface of the deflector.

Since for most applications the intensity of the impact force from the stream on the deflection surface varies somewhat along the surface, suitably the deflection surface has an erosion resistance which varies along the deflection surface in accordance with the variation of the impact force so that the deflection surface is substantially uniformly eroded by the stream.

The invention will be described hereinafter in more detail and by way of example with reference to the accompanying drawings in which

Fig. 1 schematically shows a longitudinal section of an embodiment for borehole drilling of the jet cutting device of the invention; and

Fig. 2 schematically shows a detail of the embodiment of Fig. 1.

Referring to Fig. 1 there is shown a drilling assembly including a drill string 1 extending into a borehole 2 formed in an earth formation 3 and a jet cutting device 5 arranged at the lower end of the drill string 1 near the bottom 7 of the borehole 2, whereby an annular space 8 is formed between the drilling assembly 1 and the wall of the borehole 2. The drill string 1 and the jet cutting device 5 are provided with a fluid passage 9, 9a for drilling fluid to be jetted against the borehole bottom, as is described hereinafter. The jet cutting device 5 has a cutter head 5a provided with a mixing chamber 10 having a first inlet in the form of inlet nozzle 12 in fluid communication with the fluid passage 9, 9a, a second inlet 14 for abrasive particles and an outlet in the form of jetting nozzle 15 directed towards a deflector 16 which is described hereinafter in more detail. A longitudinal extension 5c of cutter head 5a is provided to keep the jetting deflector 16 a selected distance from the borehole bottom 7. A recess 17 is arranged in the cutter head 5a at the side surface thereof, which is in fluid communication with the mixing chamber 10 and with the second inlet 14.

Fig. 2 shows a perspective view of the recess 17 whereby a semi-cylindrical side wall 18 of the recess 17 has been indicated. A cylinder 19 rotatable in direction 20 (cf. Fig. 1; in Fig. 2 the cylinder has been removed for clarity purposes) is arranged in the recess 17, the diameter of the cylinder being such that only a small clearance is present between the cylinder 19 and the side wall 18 of the recess 17. The outer surface of the cylinder 19 has been magnetised, whereby a number of N and S poles alternate in circumferential direction. The second inlet 14 and the mixing chamber 10 each have a side wall formed by the outer surface of the cylinder 19. Furthermore, the second inlet 14 has opposite side

walls 22, 24 which converge towards the mixing chamber 10 and which extend substantially perpendicular to the side wall 18.

5 The deflector 16 extends into a lower recess 26 of the cutter head 5a in a manner allowing movement of the deflector 16 relative to the cutter head 5a. A control means in the form of actuator 28 is arranged in the lower recess 26 to support the deflector 16 and to control movement of the deflector 16 relative to the cutter head 5a. The deflector 16 is arranged so that during operation of the jet cutting device 5 a stream of fluid 30 ejected by the nozzle 15 impacts onto inner surface 32 of the deflector at a selected angle 34. The inner surface 32 is preferably made of an erosion resistant material like Tungsten Carbide.

15 The actuator 28 is capable of moving the deflector in opposite directions 36a, 36b which are substantially parallel to the deflector inner surface 32 and opposite directions 38a, 38b, which are substantially perpendicular to the deflector inner surface 32. Furthermore the actuator 28 is capable of rotating the actuator so as to change the angle 34 at which the stream 30 impacts on the deflector inner surface 32.

20 During normal operation of the drilling assembly 1, a stream of drilling fluid initially containing abrasive particles is pumped via the fluid passage 9, 9a and the inlet nozzle 12 into the mixing chamber 10. The abrasive particles include a magnetically active material such as martensitic steel, and typical abrasive particles are  
25 martensitic steel shot or grit. The stream flows through the jetting nozzle 15 in the form of a jet stream 30 against the deflector 16 which deflects the stream 30 to form deflected stream 40 impacting against the borehole bottom 7. The direction of deflected stream 40 is  
30

determined by the angle of impact 34, the deflector shape and the deflector orientation.

After all abrasive particles have been pumped through the fluid passage 9, 9a, drilling fluid which is substantially free of abrasive particles is pumped through the passage 9, 9a and the inlet nozzle 12 into the mixing chamber 10.

By the impact of the jet stream 40 against the borehole bottom 7, rock particles are removed from the borehole bottom 7. The drill string 1 is simultaneously rotated so that the borehole bottom 7 is evenly eroded resulting in a gradual deepening of the borehole. The rock particles removed from the borehole bottom 7 are entrained in the stream which flows in upward direction through the annular space 8. As the stream passes the cylinder 19 the abrasive particles are attracted by the magnetic forces induced by cylinder 19, which magnetic forces thereby separate the abrasive particles from the stream and move the particles onto the outer surface of the cylinder 19. The cylinder 16 is induced to rotate a) due to frictional forces exerted to the cylinder by the stream of drilling fluid flowing into the mixing chamber, b) due to frictional forces exerted to the cylinder by the stream flowing through the annular space 8, and c) due to the high velocity flow of drilling fluid through the mixing chamber 10 which generates a hydraulic pressure in the mixing chamber 10 significantly lower than the hydraulic pressure in the annular space 8. The abrasive particles adhered to the outer surface of the cylinder 16 thereby move through the second inlet 14 in the direction of the mixing chamber 10. The converging side walls 22, 24 of the second inlet 14 guide the abrasive particles into the mixing chamber 10. Upon arrival of the particles in the mixing chamber 10 the stream of drilling fluid ejected from the inlet nozzle 12

removes the abrasive particles from the outer surface of the cylinder 19 whereafter the particles are entrained into the stream of drilling fluid.

5 The remainder of the stream flowing upwardly through the annular space 8 is substantially free of abrasive particles and continues flowing upwardly to surface where the drill cuttings can be removed from the stream. After removal of the drill cuttings the drilling fluid is pumped through the fluid passage 9, 9a and the inlet  
10 nozzle 12, into the mixing chamber 10 so as to entrain again the abrasive particles, etc.

When the area of deflector surface 32 where the stream 30 impacts becomes worn, the actuator 28 is induced to move the deflector 16 either in direction 36a  
15 or 36b so as to displace said area away from the location of impact and to position a new area of deflector surface 32, not worn, at the location of impact. In this manner it is achieved that the life time of the deflector is increased.

20 When it is desired to change the direction of the deflected stream 40, the actuator 28 is induced to rotate the deflector so as to change the angle 34 at which the stream 34 impacts on the deflector.

25 Furthermore when it is desired to increase the diameter of the borehole 2 drilled, the actuator 28 is induced to move the deflector 16 in the direction 38b thereby increasing the distance between the deflector 16 and the stream 30. Conversely, when it is desired to decrease the diameter of the borehole 2 drilled, the  
30 actuator 28 is induced to move the deflector 16 in the direction 38a thereby decreasing the distance between the deflector 16 and the stream 30.



C L A I M S

1. A jet cutting device, comprising a cutter head provided with at least one nozzle for ejecting a stream of fluid against a body so as to create a selected cut in said body, wherein, for each nozzle, the cutter head is  
5 provided with a deflector having a deflection surface arranged to deflect the stream of fluid ejected by the nozzle into a selected direction in accordance with the position of said cut to be created.

2. The jet cutting device of claim 1, wherein said pump  
10 means is arranged to induce a stream of liquid including abrasive particles through the nozzle.

3. The jet cutting device of claim 1 or 2, wherein the deflection surface is concave.

4. The jet cutting device of any one of claims 1-3,  
15 wherein the impact force of the stream on the deflection surface varies along the deflection surface, and wherein the deflection surface has an erosion resistance which varies along the deflection surface in accordance with the variation of the impact force of the stream on the  
20 deflection surface so that the deflection surface is substantially uniformly eroded by the stream.

5. The jet cutting device of any one of claims 1-4,  
wherein the deflector is movable relative to the cutter head, and the jet cutting device further includes control  
25 means for controlling movement of the deflector relative to the cutting head.

6. The jet cutting device of claim 5, wherein the control means is arranged to move the deflector so as to displace a first portion of the deflection surface away  
30 from the location at which the stream impacts on the

deflection surface, and to position a second portion of the deflection surface at said location.

7. The jet cutting device of claim 5, wherein the control means is arranged to move the deflector so as to change the angle at which said stream impacts on the deflector.

8. The jet cutting device of claim 5, wherein the control means is arranged to move the deflector in a translating movement so as to change the distance between the deflector and said stream.

9. The jet cutting device of any one of claims 1-8, wherein the cutter head forms part of a drill string for drilling a borehole into an earth formation, and wherein each nozzle is arranged to eject a stream of fluid including abrasive particles into the borehole so as to further drill the borehole.

10. The jet cutting device of claim 9, wherein each nozzle is arranged to drill a central part of the borehole by a portion of the stream ejected by the nozzle not deflected by the deflector, and to drill a radial outer part of the borehole by a portion of the stream deflected by the deflector positioned close to the borehole.

11. The jet cutting device substantially as described hereinbefore with reference to the drawings.

Fig.1.


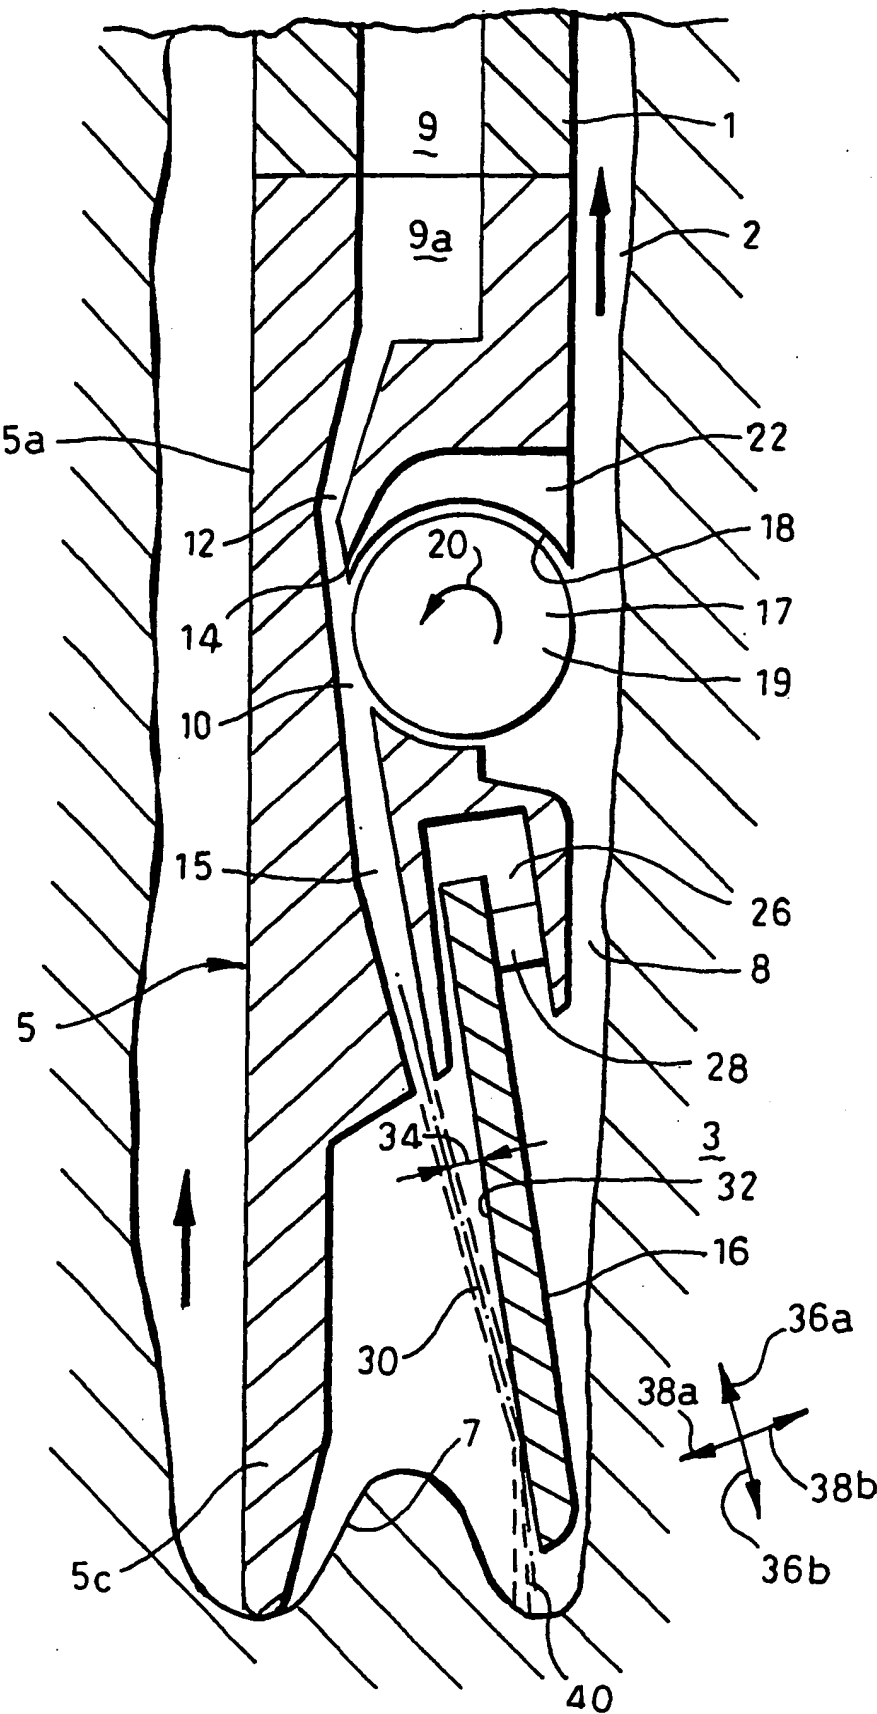


Fig.2.

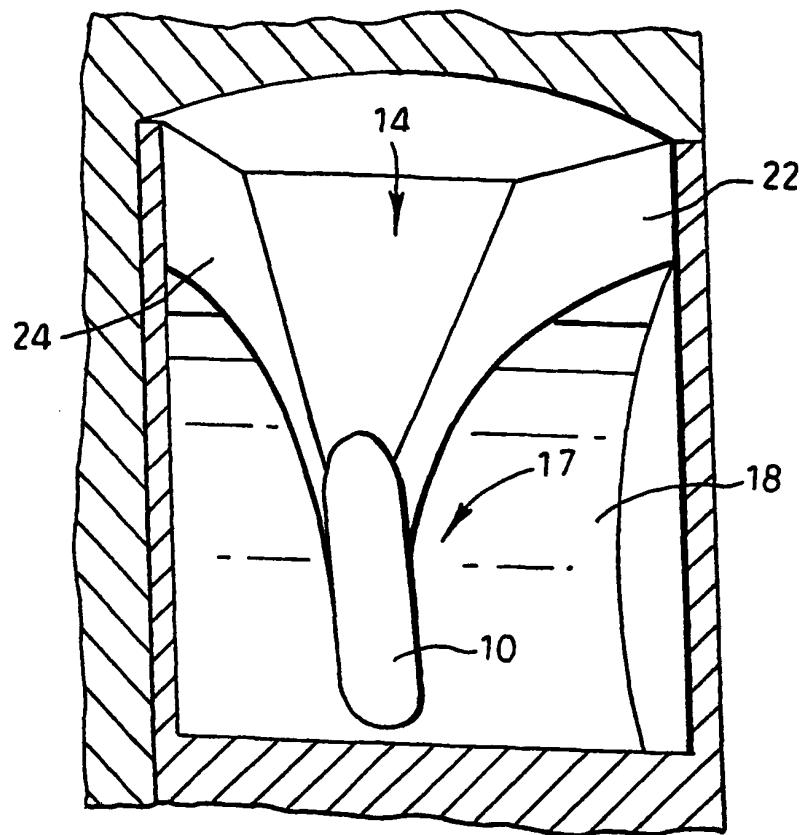

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 E21B7/18 B24C5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 E21B B24C B26F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|------------|--|-----------------------|
| X          | US 4 708 214 A (KRAWZA WALTER G ET AL)<br>24 November 1987 (1987-11-24)<br>column 4, line 50 -column 5, line 7;<br>figure 3                        | 1,2,5,9,<br>10        |
| X          | US 5 664 992 A (WILLIAMS JR ROBERT V)<br>9 September 1997 (1997-09-09)<br>column 3, line 48 - line 52<br>column 5, line 9 - line 15; figures 5,7-9 | 1-3                   |
| A          | WO 00 66872 A (SHELL CANADA LTD ;SHELL INT<br>RESEARCH (NL))<br>9 November 2000 (2000-11-09)<br>cited in the application<br>figure 1               | 1-11                  |
|            | ---<br>-/--  |                       |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 August 2002

Date of mailing of the international search report

16/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Garrido Garcia, M

| Category * | Citation of document, with indication, where appropriate, of the relevant passages                 | Relevant to claim No. |
|------------|--|-----------------------|
| A          | US 3 897 836 A (HALL J MICHAEL ET AL)<br>5 August 1975 (1975-08-05)<br>column 2, line 62 - line 64 | 1-11                  |
| A          | US 6 062 311 A (SCOTT DAVID ET AL)<br>16 May 2000 (2000-05-16)<br>column 4, line 4 - line 22       | 1-11                  |

| Patent document<br>cited in search report |   | Publication<br>date | Patent family<br>member(s)  | Publication<br>date  |
|---|---|---------------------|---|--|
| US 4708214                                | A | 24-11-1987          | US 4663893 A<br>CA 1264732 A1   | 12-05-1987<br>23-01-1990   |
| US 5664992                                | A | 09-09-1997          | US 5885133 A  | 23-03-1999   |
| WO 0066872                                | A | 09-11-2000          | AU 4564300 A<br>BR 0010111 A<br>CN 1349585 T<br>WO 0066872 A1<br>EP 1175546 A1<br>NO 20015170 A | 17-11-2000<br>19-02-2002<br>15-05-2002<br>09-11-2000<br>30-01-2002<br>23-10-2001 |
| US 3897836                                | A | 05-08-1975          | NONE  |  |
| US 6062311                                | A | 16-05-2000          | GB 2324818 A<br>CA 2236563 A1   | 04-11-1998<br>02-11-1998   |

**THIS PAGE BLANK (USPTO)**